
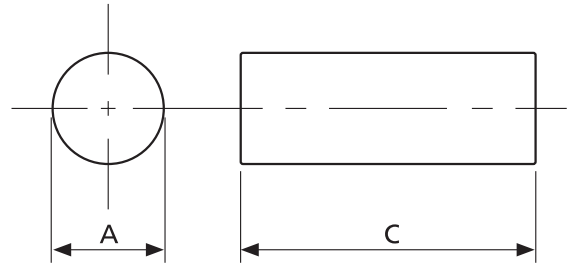


Type : R Cores

Ordering Code:

Shape:



DIMENSIONS

| CORES | DIMENSIONS (mm) | | | | | | | |
|----------------|-----------------|---|--------------|---|---|---|---|---|
| | A | B | C | D | E | F | G | H |
| R2.5*18 | 2.50 ± 0.20 | | 18.00 ± 0.50 | | | | | |
| R8*22 | 8.00 ± 0.20 | | 22.00 ± 0.60 | | | | | |

EFFECTIVE PARAMETERS

| CORES | EFFECTIVE PARAMETERS | | | | |
|----------------|------------------------------------|--------|----------------------|----------------------|-----------|
| | C ₁ (mm ⁻¹) | Le(mm) | Ae(mm ²) | Ve(mm ³) | Wt(g/set) |
| R2.5*18 | 3.67 | 18.00 | 4.91 | 88.38 | 0.40 |
| R8*22 | 0.44 | 22.00 | 50.26 | 72.26 | 5.20 |

ELECTRICAL CHARACTERISTICS

| CORES | AL ± 25% (nH/N ²) | | | | | | | |
|----------------|-------------------------------|-----|-----|----|-----|-----|----|-----|
| | P4 | P41 | P46 | P5 | P51 | P52 | N4 | N42 |
| R2.5*18 | | | | | | | 21 | |
| R8*22 | 27 | | | 22 | | | | |

Remark:

AL Value Testing Condition : 20kHz,1V, 42.5Ts, 0.8mm 2UEW. If testing condition is different from ACME's, Please specify upon request & ordering.